

## Seals and Lacquers

% = Gloss Level

# Have the answers™

### Parquet Barrier Seal



**Beckers** | Shellac based barrier seal for old floors where traces of wax may be present. Gives an excellent depth of colour over oak flooring. Eliminates grain rising. Quick overcoat time with a recommended lacquer/seal @ 3 hours

850067 5Ltr

### Parquet Primer



**Beckers** | Waterborne primer for initial coat on unfinished wood. Quick drying approx 1½ hours at 20°C. Reduces grain raising. High coverage of 10/12m² per litre

850068 5Ltr

### Parquet One



**Beckers** | Water-based - outstanding durability and beautiful finish. Quick drying - recoatable after 1 hour in normal conditions. Excellent all-round performance on domestic or commercial floors. Highly recommended

850069 Matt 5Ltr

850070 Satin 5Ltr

850071 Gloss 5Ltr

10+ units any finish (Nett)

### Parquet Pro



**Beckers** | Water-based two pack polyurethane lacquer. Resistant to chemical wear. Suitable for high traffic areas. Gives a natural appearance. Recoatable after 3 hours.

850075 Matt 5.5Ltr (incl. hardener)

10+ units (Nett)

### Parquet Performance



**Beckers** | A1 pack with the performance of a 2 pack. Water based. Suitable for high traffic areas. Sport floors (gloss/satin only). Recoatable in 1½ hours

850072 Matt 5Ltr

850073 Satin 5Ltr

850074 Gloss 5Ltr

10+ units any finish (Nett)

### Granyle

DG



**Beckers** | Fast drying two pack acid curing lacquer. Excellent abrasion resistance and flexibility. Easy to apply. Recoat after 1 hour in normal conditions. Resistant to most household chemicals.

850076 5Ltr Satin

10+ units (Nett)

### Prime Classic



**Bona** | The original waterborne primer for use on bare wood. Benefits from an elastic property designed to minimise side bonding and is a known problem solver over end grain, softwood plank and floors over underfloor heating. Reduces grain raising. Quick drying approx 1½ hours.

850077 1Ltr

850078 5Ltr

3 x 5Ltr units + (each Nett)

### Prime Deep

New



**Bona** | Oil based primer giving the same colour and depth to the wood as old traditional solvent based finishes. Drying time approx. 12-72 hours.

Coverage: 30-40m²/litre.

850330 1Ltr

### Prime Intense



**Bona** | One component 100% PU waterborne base coat for bare timber. Gives a well bodied look with a rich colouration. Easy to abrade and reduces the risk of side bonding. Quick drying approx 1½ hours. 3 per case.

850079 5Ltr

### Prime Tempo



**Bona** | One component co-polymer waterborne base coat for bare timber. Rapid drying of approx 1 hour reduces waiting time prior to further application of floor lacquer. Gives a light coloured surface which is easy to abrade. 3 per case.

850080 5Ltr

### Sportive Primer



**Bona** | One component water based primer for use on unfinished wooden sports floors prior to using Sportive Finish. High solids content. Well bodied finish which enhances the natural wood colour. Drying time approx 2-2½ hours.

850081 10Ltr

### Sportive Finish



**Bona** | Two component waterborne 100% polyurethane finish for wooden sports floors. High resistance to wear, scuff marks and scratches. Meets DIN norm 18 032 for slip resistance. 2½-3 hours drying time between coats. Includes hardener.

850082 Gloss 10Ltr

850083 Matt 10Ltr

**Sportive Hardener**



**Bona** | Replacement hardener for Sportive Finish

**850084** 400ml

**Naturale 1 Residential**



**Bona** | Gives the floor a unique elegant look. Simple 2 coat system - job completed in one day. Ideal for residential applications. No primers required. Resistant to most household chemicals. 3 per box.

**Coverage:** 1st coat 7-9m<sup>2</sup>/litre, 2nd coat 8-10m<sup>2</sup>/litre

**850085** 4.5Ltr

**Naturale 2 Commercial**



All the features of Naturale 1 but includes hardener for commercial floors subject to heavy wear. Recommended to be used over Bona Naturale Base. 3 per box.

**Application:** 1x Base, 2/3 coats of Naturale 2.

**850086** 4.5Ltr

**Naturale Base**



**Bona** | Gives the look and feel of pure wood. Prevents side bonding. Even wood colouration. To be overcoated with Naturale 1 or 2. 3 per box.

**850087** 4.5Ltr

**Naturale Repair Kit**



**Bona** | Contains everything you need to spot repair floors finished with Bona Naturale.

**850310** Per kit

**Traffic**



**Bona** | 100% Polyurethane waterborne. Commercial use. Non-yellowing surface. Unfinished/Prefinished floors. 3 - 4 hours drying time. Twice as resistant to wear than Mega.

**850088** 5 Litre Matt (inc. hardener)

**850089** 5 Litre Satin (inc. hardener)

**Traffic Antislip**

**New**



**Bona** | All the features of Bona Traffic but with an additional benefit of anti slip properties. Ideal choice for stairs, nurseries, kitchens and similar locations.

**Re-coat time:** 3-4 hours.

**850331** 5 Litre Matt (inc. hardener)

**Traffic Hardener**



**Bona** | Replacement hardener for Traffic.

**850090** 0.5 Litre

**Mega**



**Bona** | 100% Polyurethane waterborne. Oxygen crosslinked cure. For commercial & domestic areas. High scuff resistance. 2½ - 3 hours dry time. Deep rich finish. Can be used with crosslinker over some prefinished floors.

**850091** 5 Litre Matt

**850093** 5 Litre Satin

**850092** 1 Litre Satin

**850094** 5 Litre Gloss

**Novia**



**Bona** | Waterbased single part lacquer for general use. NMP and NEP free. Produces a warm appearance when used as a primer under Mega and Traffic. 3 per case.

**850307** 5 Litre Matt

**850308** 5 Litre Satin

**850309** 5 Litre Gloss

6 x 5Ltr units + (Nett)

**Crosslinker**



**Bona** | Increases adhesion of Mega to existing surface coatings. Increases scuff and spill resistance when used with Spectra. 12 per case.

**850098** 100ml

**BULK DISCOUNT on Bona Lacquers**

**CONTACT SALES FOR FURTHER DETAILS**

Bulk discounts are available on the complete Junckers Floor Finishes range.

Please contact Sales for further details.



High Performance Friction +

Benefits from a textured surface for areas where a high level of slip resistance is required.



Retarder




**Bona** | An additive that improves levelling and prolongs the open time of Bona waterborne finishes. Minimizes the risk of overlapping and discolouration. Add maximum 4% Bona Retarder to the finish. See instructions for details.

850099 200ml

Bourneseal

DG



**Bourneseal** | Oleo-resinous penetrative seal - gloss finish. Coverage 12-14m<sup>2</sup>/litre. Heat, stain, oil and water resistant. Recommended for mosaic panels. Drying time minimum 6-8 hours. 2 per case.

850100 5 Litre Gloss

Isolacquer

DG



**Junckers** | 2 component solvent-based polyurethane lacquer. Ideal for sports floors. Fast drying and extremely durable. Unique depth of colour. Recoatable in 2 - 2 1/2 hours. 1 per case.

850001 10 Litre Silk Matt (60-70%)

Isolacquer Friction Plus

DG



**Junckers** | Add to 10.0 Iso lacquer to increase dry slip.

850002 0.25 Litre

Strong



**Junckers** | Waterborne polyurethane lacquer. Suitable for untreated and lacquered wooden floors. Excellent flow, wear resistance and defoaming properties. Drying time 4 hours - maximum hardness 72 hours. 3 per case.

850004 5 Litre Silk Matt (50%)

850005 5 Litre Matt Matt (20%)

High Performance Sport Lacquer



**Junckers** | 2 component water-borne lacquer. Meets BSEN14904. Excellent durability and scuff resistant. Fast drying - ready for use the next day. 95% cured after 12 hours.

850006 5 Litre Silk Matt (50%)

High Performance Friction+



**Junckers** | 2 component water based lacquer ideal for use where wet slip resistance is a priority. Benefits from a unique textured antislip finish. 95% cured after 12 hours.

850010 5 Litre Ultra Matt (10%)

High Performance Commercial Lacquer



**Junckers** | 2 component water-based polyurethane lacquer. For prefinished or untreated commercial areas. Excellent durability and scuff resistant. Fast drying - ready for use the next day. 95% cured after 12 hours. 2 per case.

850008 5 Litre Silk Matt (50%)

High Performance Ultra Matt Lacquer



**Junckers** | High traffic areas. 2 component water-borne lacquer. Ultra Matt gives an oiled look, when used in conjunction with oil based sealer. 95% cured after 12 hours.

850009 5 Litre Ultra Matt (10%)

**Pro Tech**

DG



**Junkers** | 1 component oil based lacquer for residential and commercial use. Sanding and recoat time approx. 6 hours.

<b>850011</b>	2.5 Litre Ultra Matt (10%)	
<b>850012</b>	5 Litre Ultra Matt (10%)	
<b>850013</b>	2.5 Litre Matt (20%)	
<b>850014</b>	5 Litre Matt (20%)	
<b>850015</b>	2.5 Litre Semi Gloss (50%)	
<b>850016</b>	5 Litre Semi Gloss (50%)	
<b>850017</b>	2.5 Litre Gloss (70%)	
<b>850018</b>	5 Litre Gloss (70%)	

**Pro Finish**



**Junkers** | 1 component water based co polymer pu/acrylic lacquer. Very fast drying - 3 hours.

<b>850019</b>	5 Litre Ultra Matt (10%)	
<b>850020</b>	5 Litre Matt (20%)	
<b>850021</b>	5 Litre Semi Gloss (50%)	
<b>850022</b>	5 Litre Gloss (70%)	

**Professional 625 Lacquer**

DG



**Junkers** | Quick drying 2 component, acid curing lacquer. Fully compliant 2007. Sanding and recoat time approx. 1-1½ hours.

<b>850023</b>	5 Litre Matt (10%)	
<b>850024</b>	5 Litre Semi Gloss (35%)	
<b>850025</b>	5 Litre Gloss (95%)	

**Pro Seal Primer**

DG



**Junkers** | For priming untreated floors prior to an application of ultra Matt, Strong or H.P. Sport. Sanding and recoat time approx. 6 hours.

<b>850026</b>	5 Litre	
---------------	---------	--

**Prelak**



**Junkers** | Water-based primer - used with Strong and HP Commercial. Dries in 1-2 hours. Coverage 8m<sup>2</sup>/litre.

<b>850027</b>	5 Litre (single pack)	
---------------	-----------------------	--

**Base Prime**

DG



**Junkers** | Solvent based primer for all untreated floors prior to application of all Junkers lacquers. Ideally suited for exotic woods where water based primers have poor adhesion. Dries in 15 minutes and does not need screen meshing before applying further coats.

<b>850028</b>	5 Litre	
---------------	---------	--

**Lacquer Spray Aerosol**

DG



**König** | An easy to use spray lacquer for small repair areas and protecting fast fill repair filler. Very good adhesion to many surfaces. Dust dry after only 10 minutes.

<b>750031</b>	400ml Silk/Matt	
---------------	-----------------	--



**SAFER PRODUCTS FOR THE FLOORING INDUSTRY**

Bulk discounts on Marldon products - contact sales

**Floor Prime**



**Marldon** | **MXL500** Waterbourne one part acrylic primer for unfinished wooden floors. Enhances the colour of wood. Improves the overall build. Rapid drying 1-2 hours. 3 per box.

<b>850101</b>	5 Litre Nett	
---------------	--------------	--

**Floor Lacquer**



**Marldon** | **MXL510 Matt/MXL520 Satin/MXL530 Gloss** Waterbourne one part acrylic lacquer for all wooden floors in domestic and commercial areas. Excellent durability and natural finish. Rapid drying 1-2 hours. NMP Free low V.O.C's. 3 per box.

<b>850102</b>	5 Litre Matt Nett	
<b>850103</b>	5 Litre Satin Nett	
<b>850104</b>	5 Litre Gloss Nett	
	3 units or more (Nett)	

**Floor Lacquer Contract**



**Marldon** | **MXL540 Matt/MXL550 Satin/MXL560 Gloss** Waterbourne one part acrylic lacquer for all high traffic areas. Outstanding durability and wear resistance. Satin and Gloss suitable for wooden sports floors. NMP Free low V.O.C's. Rapid drying 1-2 hours. 3 per box.

<b>850105</b>	5 Litre Matt Nett	
<b>850106</b>	5 Litre Satin Nett	
<b>850107</b>	5 Litre Gloss Nett	
	3 units or more (Nett)	

**Excel**



**Ronseal** | Water-based polyurethane floor seal. Rapid re-coat time of 1-2 hours. Superb, durable natural finish. Designed for domestic and light commercial floors. Non yellowing.

<b>850108</b>	5 Litre Satin	
	10 units or more Nett	

**Quick Cure**



**Ronseal** | 100% hardness in 12 hours, recoat in 1½ hours. Commercial & Domestic Flooring. Non-yellowing - Low odour. 100% polyurethane, catalysed water-based seal. 2 per box.

<b>850109</b>	5 Litre Matt Nett	
<b>850110</b>	5 Litre Satin Nett	
<b>850111</b>	5 Litre Gloss Nett	

**Quick Prime**



**Ronseal** | Water-based primer for Quick Cure and High Traffic. Quick dry - 1-2 hours. Resists tannin bleed. Reduces shrinkage, cracking and rafting. Excellent adhesion. 2 per box.

<b>850112</b>	5 Litre	
---------------	---------	--

**High Traffic**



**Ronseal** | Water-based 2 part floor seal. Quick dry - 2 hour recoat. Non-yellowing. For commercial and sport flooring. Superior scratch and chemical resistance. Includes Hardener. 2 per box.

<b>850113</b>	5 Litre Matt	
<b>850114</b>	5 Litre Silk	
<b>850115</b>	5 Litre Gloss	

**High Traffic Hardener**

DG



**Ronseal** | Replacement hardener for use with High Traffic.

<b>850116</b>	500ml	
---------------	-------	--

**Solvent-borne**

DG



**Ronseal** | Oil modified solvent borne floor lacquer. Transparent finish enhances the natural beauty of wood. Tack free in 2 hours, recoat in 4 hours. Long lasting against knocks and scratches.

<b>850117</b>	5 Litre Gloss	
<b>850119</b>	5 Litre Satin	
<b>850118</b>	20 Litre Gloss	
<b>850120</b>	20 Litre Satin	


**PV67**

DG



**Sadolin** | Two component acid-catalysed timber varnish. Recoatable in @ 1-1½ hours in normal conditions. Heat, water & alcohol resistant. Extremely hard wearing on flooring, bar tops and interior timber.

<b>850121</b>	1 Litre Satin	
<b>850122</b>	5 Litre Satin	
<b>850123</b>	1 Litre Gloss	
<b>850124</b>	5 Litre Gloss	

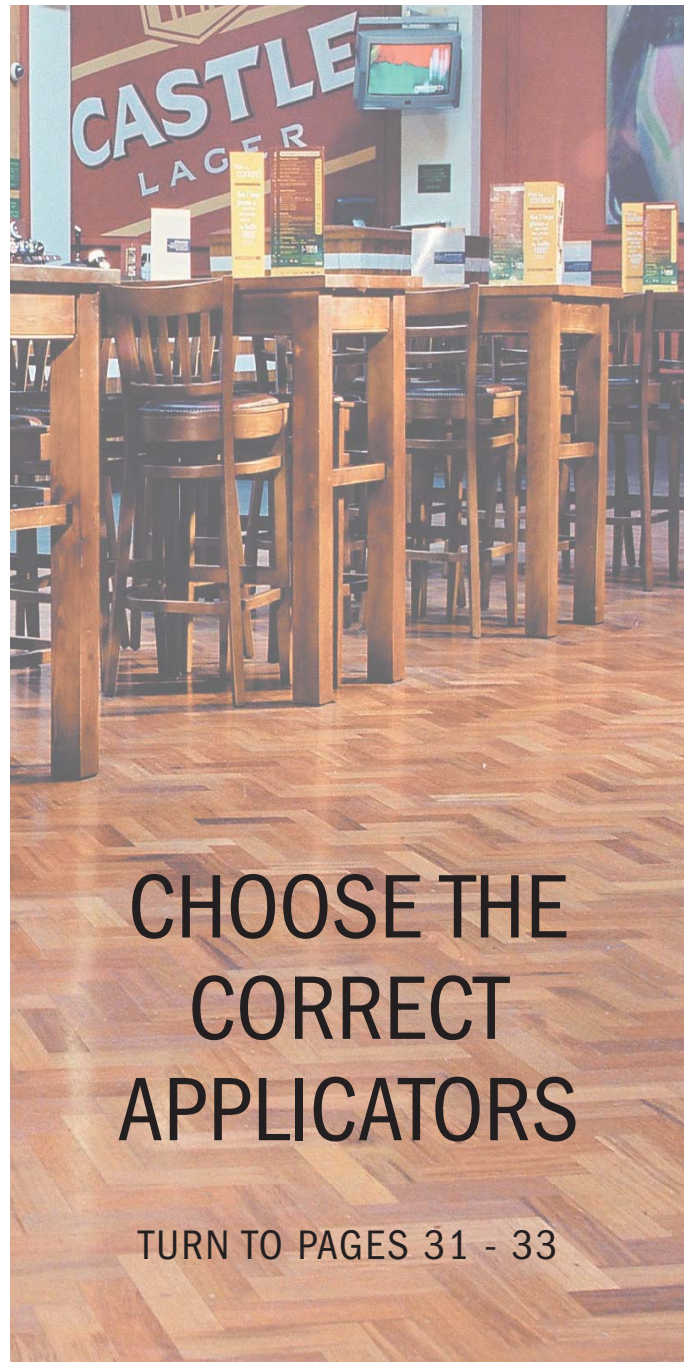

**CHOOSE THE  
CORRECT  
APPLICATORS**

**TURN TO PAGES 31 - 33**